Mini-Turbo

User Manual V1.0

01 / Product Overview

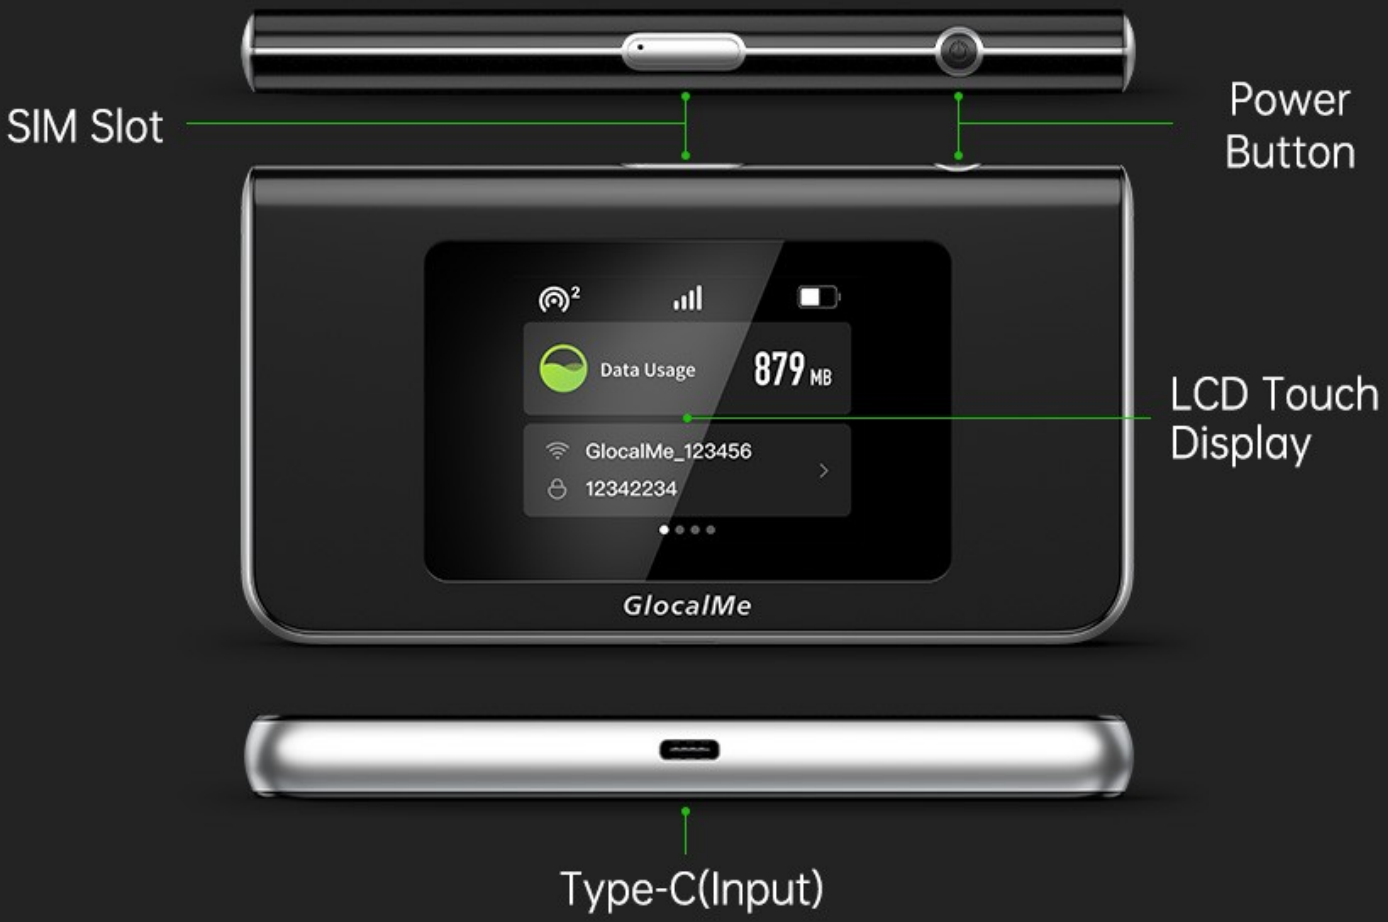

Function Introduction

Power on : Press power button for **3 seconds**.
Power off : Press power button for **6 seconds**.
Reset : Press power button for **14 seconds**.

Local SIM Guide

Local SIM is supported by Mini-Turbo, Only insert Nano-SIM card (small card). Please turn off the device first if you want to insert/pull out the SIM card.

Use a needle to pull out the SIM cards as shown in the picture below. Please contact customer service if any issue encountered.

02/Technical Specification

Model： GLMU21A02
Box content: Device, User Manual, Type-C cable, SIM removal tool.

Technical Specification：

Size： 126 × 68 × 12.1mm

Screen Size: 2.4 inch

LTE FDD： B1 / 2 / 3 / 4 / 5 / 7/ 8 / 9 / 12 / 13 / 17 / 18 / 19 / 20 / 25/ 26 / 28 / 66

LTE TDD： B34 / 38 / 39 / 40 / 41

WCDMA： B1 / 2 /4 / 5 / 6 / 8 / 9 / 19

GSM： 850 / 900 / 1800 / 1900

Wi-Fi： 2.4G; 802.11 b/g/n

SIM Slot： 1 Nano SIM

USB Port: Type-C

Battery Capacity: 3000mAh（typical）/ 3.8V

Power Input: 5V⎓2A

03/Display Icon(Subject to actual latest software)

Signal strength

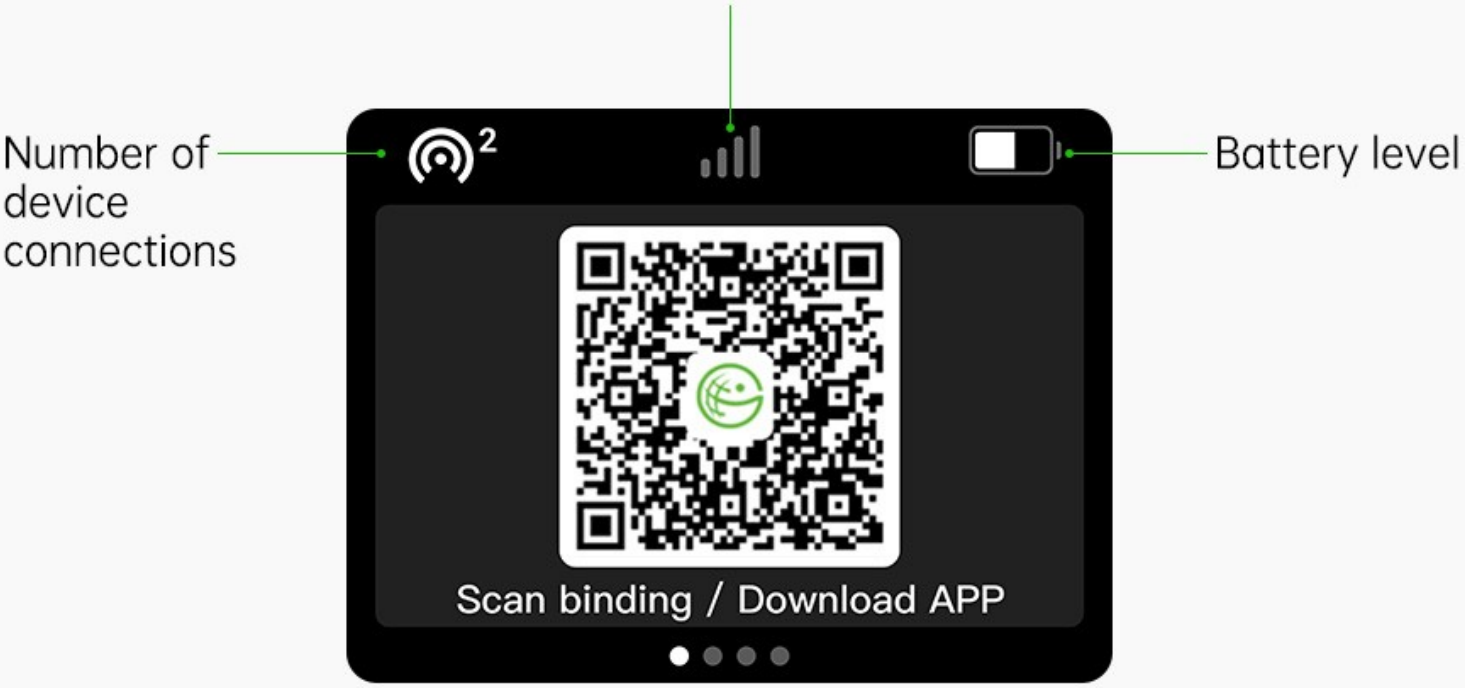

Initial page

The device is not activated: The home page displays QR code.
Device activated: The QR code can be found by clicking on the "QR code"

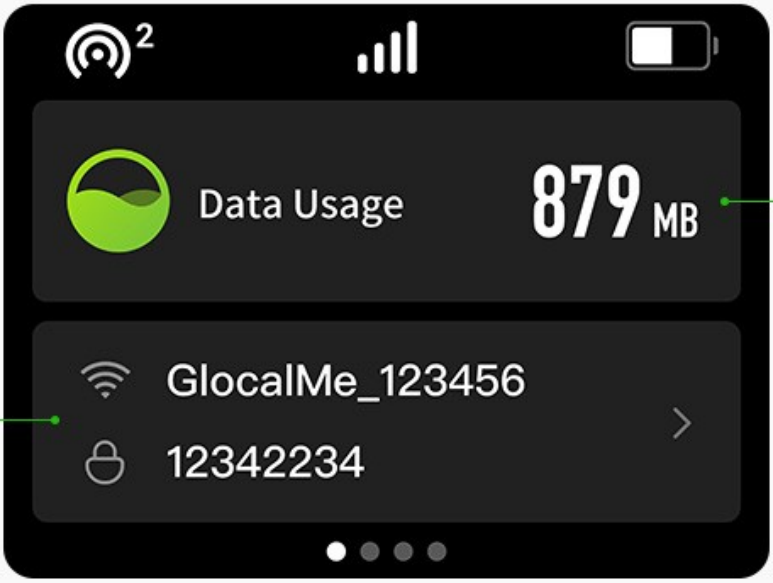

GlocalMe_123456

12342234

Flow interface

Accumulated flow: It is possible to confirm the total data amount.

SSID and PWD: Show SSID and password. Click SSID or PWD to modify it.

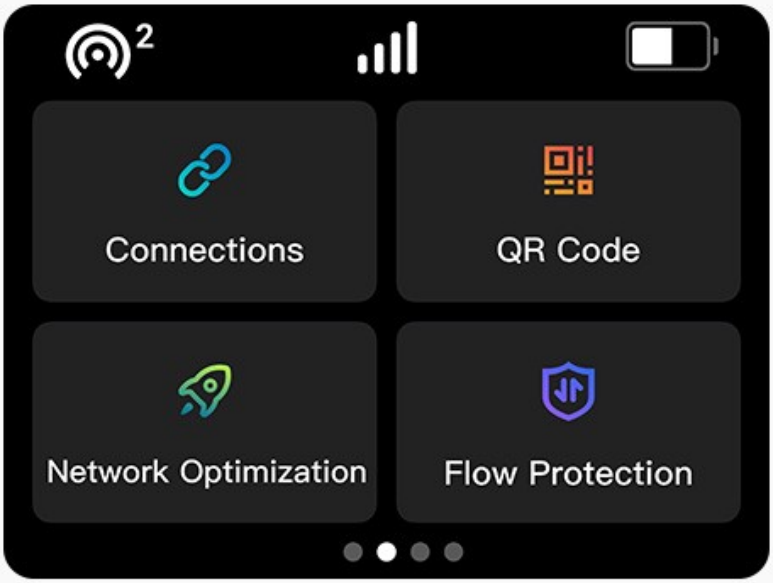

The menu-1

Connected device Management:

It is possible to block(unblock) the devices which you don't want to connect with device.

QR Code:

For downloading apps and bind the device.

Network optimization:

Please try this function when data communication is not stable.

Flow Protection:

Data management. Enable this function to prevent massive data usage of:

- Automatic app download and update.
- Automatic sync of cloud apps.

※If you can't access to the App Store, please turn this function off.

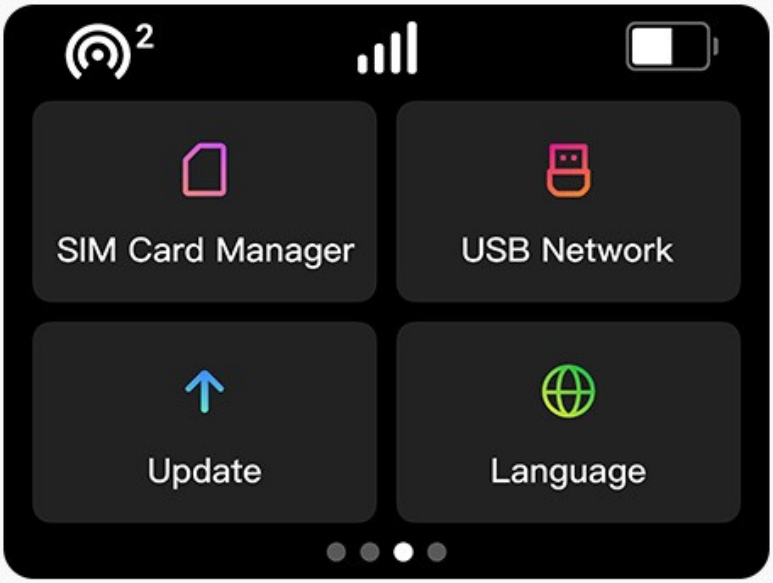

The menu-2

Physical SIM card management:

If you insert your own SIM card into device, you can connect to the internet. Please turn off the power when you insert the sim.

USB tethering:

You can connect to the internet without Wi-Fi function by connecting to the windows PC with USB cable.
※This function does not support Mac devices

Software Update:

You can confirm the software version.

※ It is impossible to update the software by yourself.

Language settings:

Please select your language.

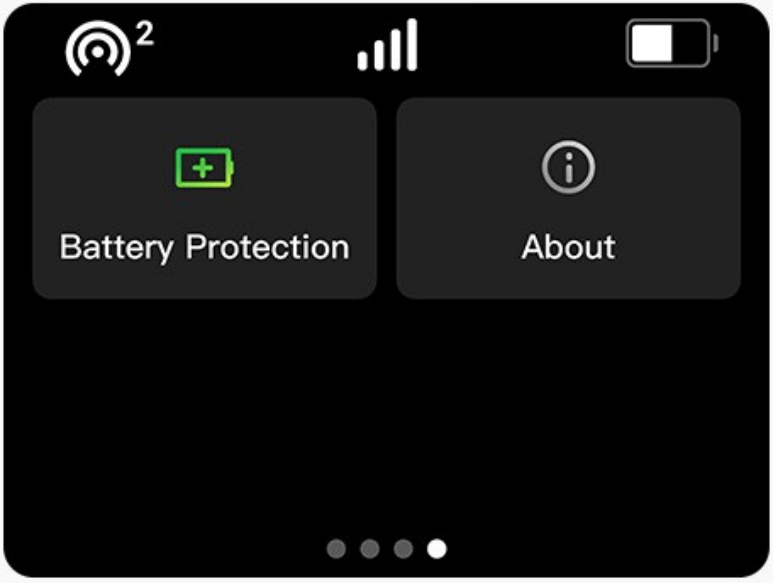

The menu-3

Battery Protection:

Intelligent protection of battery life when turned on.

About:

You can confirm device information and restore factory settings.

※Please use this function if you want to reset SSID and password.

04 / Quick Start Guide

1.Download GlocalMe App

2.Register a GlocalMe Account(in App)

Press "Login""Register"

Follow the step to register an account (You can register by email or mobile number)

3.Turn on

Press and hold the power button" ⏻ "for 3 seconds

Scan the device QR code (step3) on Mini-Turbo,

Restart your Mini-Turbo after activation success.

4.Activate Mini-Turbo

GlocalMe App "My device" "Activate Device"

Scan the device QR code (step3) on Mini-Turbo.

Restart your Mini-Turbo after activation success.

5.Connect the Wi-Fi

Find the Wi-Fi name and password on the screen.

Connect your mobile device in Wi-Fi setting.

Note

1.After successful binding, please restart the device and then it can be normally used.

2.Before you run out of the initial data, please recharge your account as soon as possible through selecting appropriate amount in the charging center of the App. We support Alipay, Paypal, and other means to pay. After recharging, you can purchase any data packages in the package center, to enjoy a lower Internet fees.

3.This product has "Data Flow Protection" turns on by default to prevent connected devices form consuming large data due to automatic system and application's updates. While this function is turn on, it might cause you to be restricted of accessing the APP store or unable to download applications. If needed, you can temporarily remove the restriction via "Flow Protection" on U30's screen.

For more information, please pay a visit to GlocalMe website:

05 / Safety,handling and support

Warning

Specific Absorption Rate (SAR) refers to the rate at which the body absorbs RF energy. The SAR limit is 1.6 watts per kilogram in countries that set the limit averaged over 1 gram of tissue and 2.0 watts per kilogram in countries that set the limit averaged over 10 grams of tissue. During testing, the device are set to their highest transmission levels in all tested frequency bands, although the SAR is determined at the highest certified power level, the actual SAR level of the device while operating can be well below the maximum value.

EU Regulatory conformance

The device complies with RF specifications and when used with an accessory that contains no metal and that positions the device a minimum of 0.5 cm from the body.

The SAR limit adopted is 2.0W/kg averaged over 10 grams of tissue. The highest SAR value reported for the device when properly worn on the body is 1.250 W/Kg complies with the limit.

Hereby, HONG KONG UCLOUDLINK NETWORK TECHNOLOGY LIMITED declares that this device is in compliance with the essential requirements and other relevant provisions of Directive (RED) 2014/53/EU。

FCC Regulatory conformance

For body worn operation, the device complies with FCC RF exposure guidelines and when used with an accessory that contains no metal and that positions the device a minimum of 1.0 cm from the body.
The SAR limit adopted by the FCC is 1.6W/kg averaged over 1 gram of tissue. The highest SAR value reported for the device when properly worn on the body is 1.383 W/Kg complies with the limit.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause.

Undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note:

This equipment has been tested and complies with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur during installation. If the device does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is suggested to try to correct the interference by the following measures:

--Reorient or relocate the receiving antenna.

--Increase the distance between the equipment and receiver.

--Connect the equipment to an outlet on a different circuit to the receiver.

Information on the disposal and recycling of the device

This symbol (with or without a solid bar) on the device, batteries (if included), and/or the packaging, indicates that the device and its electrical accessories (for example, a headset, adapter, or cable) and batteries should not be disposed of as household garbage. These items should not be disposed of as unsorted municipal waste and should be taken to a certified collection point for recycling or proper disposal. For detailed information about device or battery recycling, contact your local city office, household waste disposal service, or retail store.

Disposal of the device and batteries (if included) is subject to WEEE. Directive Recast (Directive 2012/19/EU) and Battery Directive (Directive 2006/66/EC). The purpose of separating WEEE and batteries from other waste is to minimize the potential environmental impacts and human health risk of any hazardous substances that may be present.

Do not disassemble or modify, donot short-circuit, do not dispose in fire, do not expose to high temperature, be disable after soaking. Do not squeeze or bump the battery. Do not continue to use if serious.

深圳市优克联新技术有限公司

官网：www.glocalme.com

客服热线：+852-8191-2660(HK) / +86 400-699-1314（数字键1转售前服务， 数字键3转售后服务）

邮件：service@ucloudlink.com 技术与售后问题, 请邮件联系我们

地址：中国深圳市南山区学府路深圳软件产业基地1栋A座3层

Hong Kong uCloudlink Network Technology Limited

E-mail : service@ucloudlink.com

Hotline : +852 8191 2660

Address : Suit 603, 6/F, Laws Commercial Plaza 788 Cheung Sha Wan Road, Kowloon, Hong Kong

香港uCloudlinkネットワーク技術有限公司

メールアドレス：service@ucloudlink.com

電話番号：+852 8191 2660

技術及びアフターサービス問題について、メールでこちらにご連絡ください。

アドレス：Suit 603, 6/F, Laws Commercial Plaza 788 Cheung Sha Wan Road, Kowloon, Hong Kong

GlocalMe　GlocalMe　@GlocalMeMoments　@GlocalMeMoments

uCloudlink

This product and related system are protected by one or more of uCloudlink's patents
details please refer to https://www.ucloudlink.com/patents

Copyright © 2021 uCloudlink All Rights Reserved